

FMCA Series 2000

Satin Black

FMCA 2000 series *Self Trimming Cover*

FMCA 2200 series *Flat Cover*

FMCA 2400 series *Oversize Cable Door*

Satin Hand Finished Brass

FMCA 2100 series *Self Trimming Cover*


FMCA 2300 series *Flat Cover*

Satin Hand Finished Stainless Steel

FMCA 2800 series *Oversize Cable Door*



Exploded view

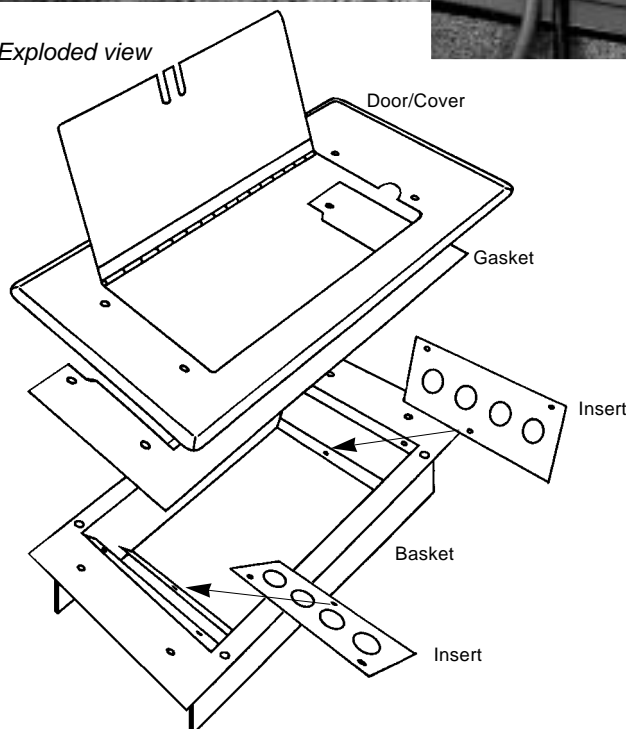

- Comes complete with choice of pre-punched Moduline® connector insert panels. Accepts industry standard connectors or optional features. See Moduline® Inserts Data Sheet.
- Options include UL® listed 120VAC duplex power receptacle.
- Durable high tech finish looks "smart"- endures wear longest.
- Hinged cover allows easy access to connectors.
- Cable slots from .25" x 1" to oversize 1.25" x 1.5".
- Self trimming or route-in versions.
- Installs on carpeted or hard surface floors. No tangled wires underfoot.
- Mounts on our BB2000 backbox.

The FMCA Series 2000 is designed for applications where more inputs (up to eight) are required. It is thin enough to also be used for wall mounting in most standard wall constructions. Great for use where site conditions mandate locating them on stage or pulpit fronts. Conceals unsightly connectors.

Popular features that make the FMCA Series unique; strongest construction to withstand abuse and heavy loads, contemporary styling, satin black finish for on camera locations, satin brass finish for "dress" applications, protection of connectors, critical connector mounting work is already done via Moduline® connector inserts.

Numerous money and labor saving advantages have been designed into the product, making the FMCA Series the highest value for any size project.

Dimensional Data (Nominal)

Door/Cover: 14" L x 8" W

Basket: 10 1/2" L x 4 5/8" W x 2 1/2" D (Max D)

Insert: 4 1/2" L x 2 1/2" W (two each)

To order or specify see page #1 of the Order Reference Guide and the Moduline® Inserts Data Sheet. Need help? Call 800 798 2256. A&E Specifications on reverse side.

Specifications:

FMCA 2000 Series Satin Black (Steel) with self trimming Door/Cover, two (2ea.) .25" x 1" cable slots

The Floor Mounted Connector Assembly shall consist of a Door/Cover, a Basket and two Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge steel, shall measure 14" \perp x 8" \forall , shall mount virtually flush with the floor or surrounding surface and shall be secured with security socket head screws. Door/Cover and integral self trimming carpet trim ring, shall have radiused corners and shall have a ceramic plastic satin black finish so as not to create specular light reflections. Basket shall be of 16 gauge steel and shall be 10.5" \perp x 4.625" \forall x 2.5" deep. Basket shall mount on manufacturer's backbox (BB2000). Connector Mounting Panels (2ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket. Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 20____ (insert model number).

FMCA 2100 Series Satin Hand Finished Brass with self trimming Door/Cover, two (2ea.) .25" x 1" cable slots

The Floor Mounted Connector Assembly shall consist of a Door/Cover, a Basket and two Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge solid brass (not plated), shall measure 14" \perp x 8" \forall , shall mount virtually flush with the floor or surrounding surface and shall be secured with security socket head screws. Door/Cover shall have radiused corners. Basket shall be of 16 gauge steel and shall be 10.5" \perp x 4.625" \forall x 2.5" deep. Basket shall mount on manufacturer's backbox (BB2000). Connector Mounting Panels (2ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket.

Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 21____ (insert model number).

FMCA 2200 Series Satin Black (Steel) with Flat Door/Cover, two (2ea.) .25" x 1" cable slots, - for routing into wood (non carpeted) surfaces.

Not recommended for concrete surfaces.

The Floor Mounted Connector Assembly shall consist of a Door/Cover, a Basket and two Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge steel, shall measure 14" \perp x 8" \forall , shall be routed flush in floor or surrounding surface and shall be secured with security socket head screws. Door/Cover and integral self trimming carpet trim ring, shall have radiused corners and shall have a ceramic plastic satin black finish so as not to create specular light reflections. Basket shall be of 16 gauge steel and shall be 10.5" \perp x 4.625" \forall x 2.5" deep. Basket shall mount on manufacturer's backbox (BB2000). Connector Mounting Panels (2ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket.

Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 22____ (insert model number).

FMCA 2300 Series Satin Hand Finished Brass with Flat Door/Cover, two (2ea.) .25" x 1" cable slots, - for routing into wood (non carpeted) surfaces.

Not recommended for concrete surfaces.

The Floor Mounted Connector Assembly shall consist of a Door/Cover, a Basket and two Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge solid brass (not plated), measuring 14" \perp x 8" \forall . Flat Door/Cover shall be routed flush with floor or surrounding surface and shall be secured with security socket head screws. Door/Cover shall have radiused corners. Basket shall be of 16 gauge steel and shall be 10.5" \perp x 4.625" \forall x 2.5" deep. Basket shall mount on manufacturer's backbox (BB2000). Connector Mounting Panels (2ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket.

Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 23____ (insert model number).

FMCA 2400 Series Satin Black (Steel) with self trimming Door/Cover, one (1ea) 1.25" x 1.5" hinged oversize cable slot

The Floor Mounted Connector Assembly shall consist of a Door/Cover, a Basket and two Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge steel, shall measure 14" \perp x 8" \forall , shall mount virtually flush with the floor or surrounding surface and shall be secured with security socket head screws. Door/Cover shall have oversized hinged cable slot 1.25" x 1.5", and with integral self trimming carpet trim ring, shall have radiused corners and shall have a ceramic plastic satin black finish so as not to create specular light reflections. Basket shall be of 16 gauge steel and shall be 10.5" \perp x 4.625" \forall x 2.5" deep. Basket shall mount on manufacturer's backbox (BB2000). Connector Mounting Panels (2ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket.

Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 24____ (insert model number).

FMCA 2800 Series Satin Stainless Steel with self trimming Door/Cover, one (1ea) 1.25" x 1.5" hinged oversize cable slot

The Floor Mounted Connector Assembly shall consist of a Door/Cover, a Basket and two Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge stainless steel, shall measure 14" \perp x 8" \forall , shall mount virtually flush with the floor or surrounding surface and shall be secured with security socket head screws. Door/Cover shall have oversized hinged cable slot 1.25" x 1.5", and with integral self trimming carpet trim ring, shall have radiused corners. Basket shall be of 16 gauge steel and shall be 10.5" \perp x 4.625" \forall x 2.5" deep. Basket shall mount on manufacturer's backbox (BB2000). Connector Mounting Panels (2ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket.

Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 28____ (insert model number).

Important Note:

Mystery Electronics backboxes are UL[®] listed and conform to all applicable N.E.M.A. Standards. While locally available boxes may seem acceptable as substitutes, there are differences in certain critical dimensions. For a fast and easy installation and to avoid costly onsite rework, the user is strongly cautioned to use only Mystery Electronics backboxes. They are proven to be the lowest cost alternative.

To order or specify see page #1 of the Order Reference Guide and the Moduline[®] Inserts Data Sheet. Need help? Call 800 798 2256.