

Free application help
and engineering
assistance available.
Call 800 798 2256

FMCA Series 3000

Satin Black

FMCA 3000 series *Self Trimming Cover*

FMCA 3200 series *Flat Cover*

FMCA 3400 series *Oversize Cable Door*

Satin Hand Finished Brass

FMCA 3100 series *Self Trimming Cover*


FMCA 3300 series *Flat Cover*

Satin Hand Finished Stainless Steel

FMCA 3800 series *Oversize Cable Door*



Exploded view

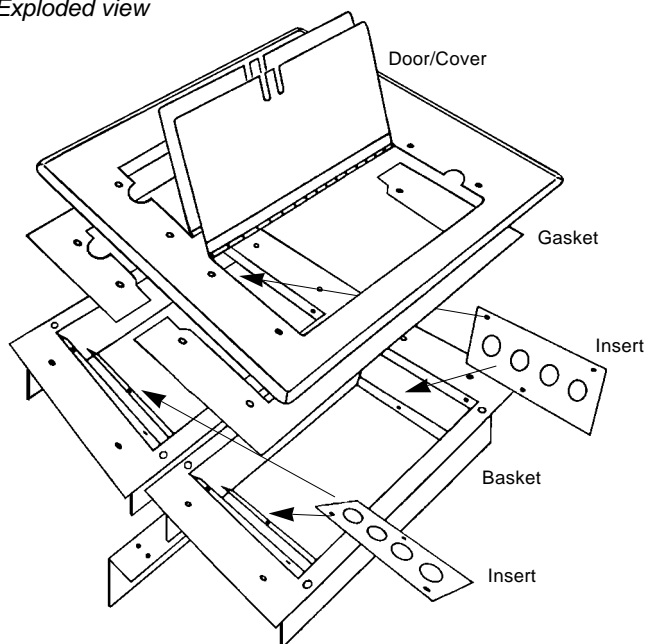

- Comes complete with choice of four (4) pre-punched Moduline® connector insert panels. Accepts industry standard connectors or optional features. See Moduline® Inserts Data Sheet.
- Options include UL® listed 120VAC duplex power receptacle.
- Durable high tech finish looks "smart"- endures wear longest.
- Hinged cover allows easy access to connectors.
- Cable slots from .25" x 1" to oversize 1.25"x 1.5".
- Self trimming or route-in versions.
- Installs on carpeted or hard surface floors. No tangled wires underfoot.
- Mounts on our BB3000 backbox.

Incorporating all the features that made the FMCA series famous, Series 3000 floor boxes offer greater capacity with up to sixteen (16) input/output connector spaces. Pre-punched Moduline® connector inserts allow tailoring a specific configuration for any project without expensive custom work. Makes every application a quick and easy installation. Low profile versions mount virtually flush with the floor and are adjustable over a wide range of onsite conditions. Flat versions can be routed in for full flush applications. Heavy duty construction withstands abuse and heavy loads.

Connectors are concealed, yet remain accessible, only the attractive Door/Cover shows. Comes complete with mounting hardware, including high security cover mounting screws and hex type wrench.

Dimensional Data (Nominal)

Door/Cover: 14" L x 14" W
Double basket: 10 1/2" L x 10 3/4" W x 2 1/2" D (Max D)
Inserts: 4 1/2" L x 2 1/2" W (four each)

To order or specify see page #1 of the Order Reference Guide and the Moduline® Inserts Data Sheet. Need help? Call 800 798 2256. A&E Specifications on reverse side.

MYSTERY ELECTRONICS 

Mystery Electronics, LLC
6438 Morton Road
Greenbrier, TN 37073
800 798 2256 sales
615 643 8460 voice
615 643 8464 fax

www.mysteryelectronics.com

FMCA Series 3000 Additional Info

Specifications:

FMCA 3000 Series Satin Black (Steel) with self trimming Door/Cover, and four (4ea) .25" x 1" cable slots

The Floor Mounted Connector Assembly shall consist of a Dual Door/Cover, a Dual Basket and four Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge steel with ceramic plastic satin black finish, measuring 14" _L x 14" _W, with an integral self trimming, carpet trim ring,, that mounts virtually flush with the floor or surrounding surface, and shall be secured with security socket head screws. Door/Cover and integral trim ring,, shall have radiused corners. Basket shall be of 16 gauge steel and shall be 10.5" _L x 10.75" _W x 2.5" deep. Basket shall mount on manufacturer's backbox (model BB3000). Connector Mounting Panels (4ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket. Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 30____ (insert model number).

FMCA 3100 Series Satin Hand Finished Brass with self trimming Door/Cover, and four (4ea) .25" x 1" cable slots

The Floor Mounted Connector Assembly shall consist of a Dual Door/Cover, a Dual Basket and four Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge, hand finished, solid brass (not plated), measuring 14" _L x 14" _W, with an integral self trimming carpet trim ring,, that mounts virtually flush with the floor or surrounding surface, and shall be secured with security socket head screws. Door/Cover and integral trim ring,, shall have radiused corners. Basket shall be of 16 gauge steel and shall be 10.5" _L x 10.75" _W x 2.5" deep. Basket shall mount on manufacturer's backbox (model BB3000). Connector Mounting Panels (4ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket. Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 31____ (insert model number).

FMCA 3200 Series Satin Black (Steel) with Flat Door/Cover, and four (4ea) .25" x 1" cable slots, for routing into wood (non carpeted) surfaces.

Not recommended for concrete surfaces.

The Floor Mounted Connector Assembly shall consist of a Dual Door/Cover, a Dual Basket and four Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge steel with ceramic plastic satin black finish, measuring 14" _L x 14" _W. Flat Door/Cover shall be routed flush in floor or surrounding surface, and shall be secured with security socket head screws. Door/Cover shall have radiused corners. Basket shall be of 16 gauge steel and shall be 10.5" _L x 10.75" _W x 2.5" deep. Basket shall mount on manufacturer's backbox (model BB3000). Connector Mounting Panels (4ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket. Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 32____ (insert model number).

FMCA 3300 Series Satin Hand Finished Brass with Flat Door/Cover, and four (4ea) .25" x 1" cable slots, for routing into wood (non carpeted) surfaces.

Not recommended for concrete surfaces.

The Floor Mounted Connector Assembly shall consist of a Dual Door/Cover, a Dual Basket and four Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge, hand finished, solid brass (not plated), measuring 14" _L x 14" _W. Flat Door/Cover shall be routed flush in floor or surrounding surface, and shall be secured with security socket head screws. Door/Cover and shall have radiused corners. Basket shall be of 16 gauge steel and shall be 10.5" _L x 10.75" _W x 2.5" deep. Basket shall mount on manufacturer's backbox (model BB3000). Connector Mounting Panels (4ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket. Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 33____ (insert model number).

FMCA 3400 Series Satin Black (Steel) with self trimming Door/Cover, and two (2ea) 1.25" x 1.5" hinged oversize cable slots.

The Floor Mounted Connector Assembly shall consist of a Dual Door/Cover with hinged oversize 1.25 x 1.5" cable slot, a Dual Basket and four Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge steel with ceramic plastic satin black finish, measuring 14" _L x 14" _W, with oversized cable slots, an integral self trimming, carpet trim ring, that mounts virtually flush with the floor or surrounding surface, and shall be secured with security socket head screws. Door/Cover and integral trim ring, shall have radiused corners. Basket shall be of 16 gauge steel and shall be 10.5" _L x 10.75" _W x 2.5" deep. Basket shall mount on manufacturer's backbox (model BB3000). Connector Mounting Panels (4ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket. Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 34____ (insert model number).

FMCA 3800 Series Satin Stainless Steel with self trimming Door/Cover, and two (2ea) 1.25" x 1.5" hinged oversize cable slots.

The Floor Mounted Connector Assembly shall consist of a Dual Door/Cover with hinged oversize 1.25" x 1.5" cable slot, a Dual Basket and four Connector Mounting Panel Inserts. Door/Cover shall be of 11 gauge stainless steel, measuring 14" _L x 14" _W, with oversized cable slots, an integral self trimming, carpet trim ring, that mounts virtually flush with the floor or surrounding surface, and shall be secured with security socket head screws. Door/Cover and integral trim ring, shall have radiused corners. Basket shall be of 16 gauge steel and shall be 10.5" _L x 10.75" _W x 2.5" deep. Basket shall mount on manufacturer's backbox (model BB3000). Connector Mounting Panels (4ea.) shall be of 14 gauge steel and shall accommodate _____ (specify quantity and type) _____ connectors and shall be removable for installation and service without disassembling Door/Cover or Basket. Floor Mounted Connector Assembly shall be Mystery Electronics FMCA 38____ (insert model number).

Important Note:

Mystery Electronics backboxes are UL[®] listed and conform to all applicable N.E.M.A. Standards. While locally available boxes may seem acceptable as substitutes, there are differences in certain critical dimensions. For a fast and easy installation and to avoid costly onsite rework, the user is strongly cautioned to use only Mystery Electronics backboxes. They are proven to be the lowest cost alternative.

To order or specify see page #1 of the Order Reference Guide and the Moduline[®] Inserts Data Sheet. Need help? Call 800 798 2256.